


30 years of radio communications, beyond.



Hytera serves 20 million users for public safety, firefighting, railway, airports, factories, hotels, supermarkets, and more industries home and abroad.



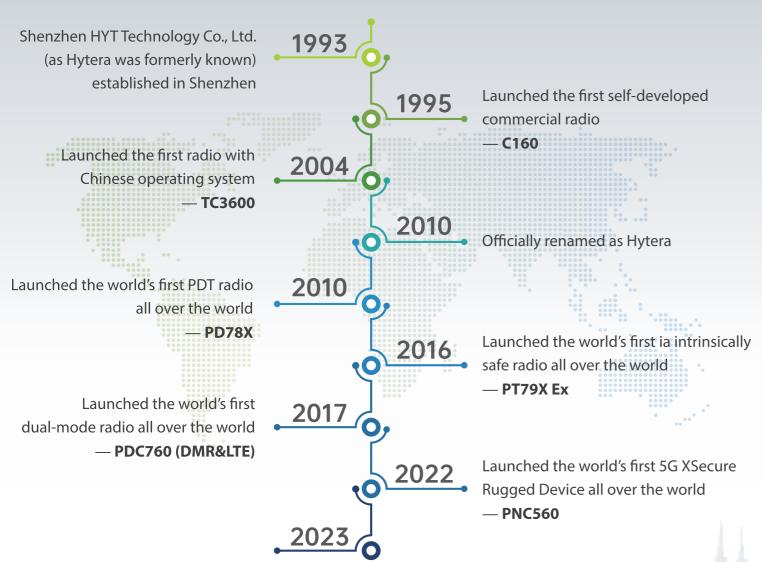









Hytera retains right to change the product design and specification. Should any printing mistake occur Hytera doesn't bear relevant responsibility. Little difference between real product and product indicate by printing materials will occur by printing reason.

#¥*T, Hytera* are registered trademarks of Hytera Communications Corp., Ltd. © 2024 Hytera Communications Corp., Ltd. All Rights Reserved.












www.hytera.com













Hytera draws inspiration from the design of the ancient Greek Doric order, and combines the characteristics of elegance, symmetry and scale to inject a unique artistic style into the S1 Pro.







A quiet solution—whisper mode.

Whisper on a call and still be heard clearly on the other end.

Protect your privacy, without disturbing peace of customers around you.









Password is passport.

Only those with the same password can join the group call. Protect the conversation against interference from neighboring groups.



Hytera Radio app, high-efficient.

Manage your radio with a phone, at your fingertips. Perform programming, batch configuration, frequency information backup, and then some.



AirClone, simple and fast.

You can clone configuration data from one S1 Pro to many. All done in a flash.






16 hrs working time

With a battery life of up to 16 hours (5/5/90 duty cycle), your focus remains on the job, not the clock.



Replaceable battery Swap a spare battery for extra-long shifts

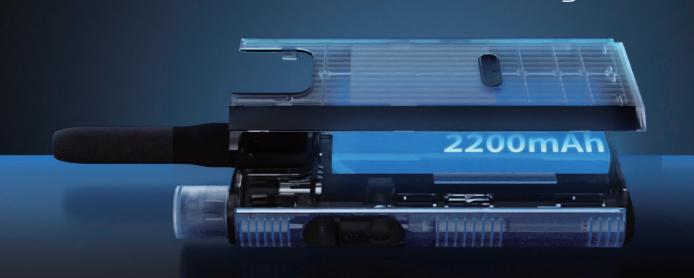




<u>(191)</u>

Uncompromised communication.

Use 9 cm antenna for greater range. Communicate smoothly even when you are much far away from your team.



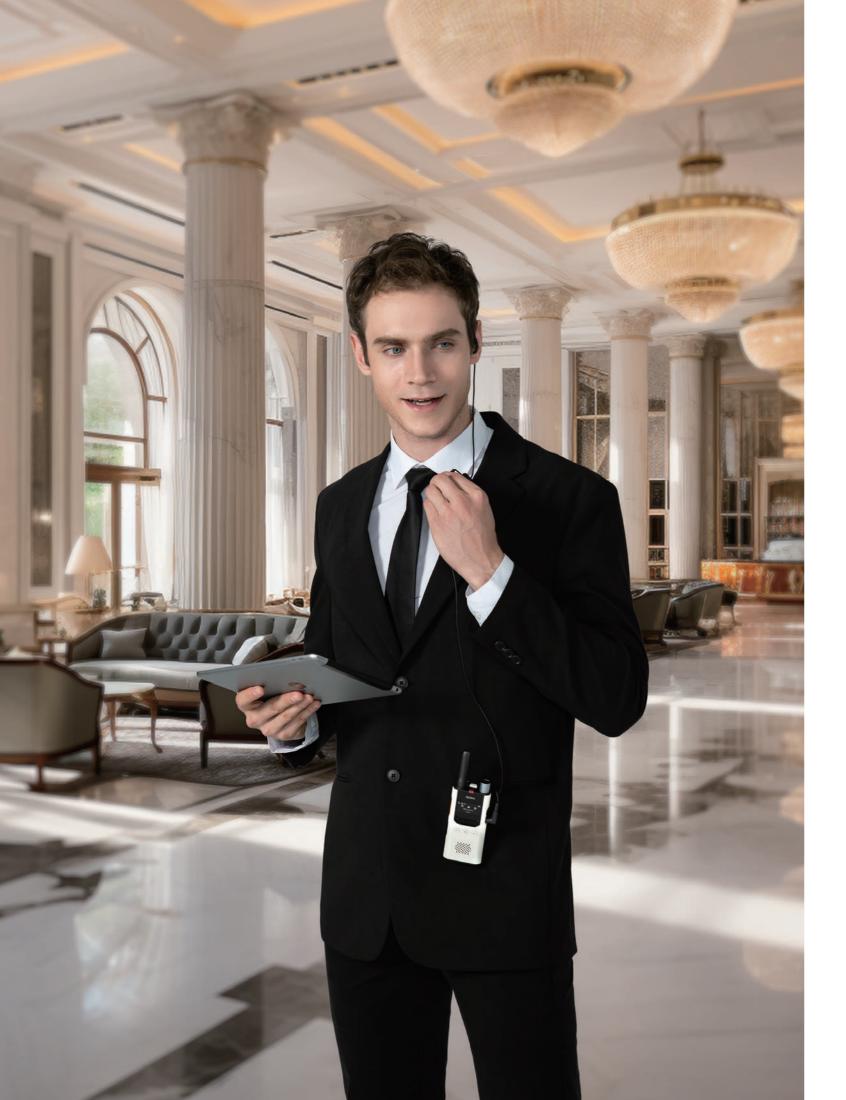

Application Scenarios







Hotel

Specifications

General	
Model	HYT-S35
Frequency Range	410-480 MHz (Main Unit)
Channel Capacity	256
Zone Capacity	6 (Digital+Analog)
Channel Capacity per Zone	88
Channel Spacing	12.5kHz/20kHz/25kHz
Operating Voltage	3.8 V (Rated)
Battery	2200mAh Li-Polymer
Battery Life (5/5/90 Duty Cycle, TX Power)*	Digital: 16 hrs (3W), 17 hrs (2W), 18 hrs (1W)
Frequency Stability	±0.5ppm
Antenna Impedance	50Ω
Dimensions (HxWxD)	108*53*20mm (without antenna)
Weight (With battery and antenna)	145g (with belt clip) 135g (without belt clip)
Display	1.3 inch OLED

Receiver	
Sensitivity	Analog: 0.18μV (12dB SINAD) Digital: 0.18μV
Adjacent Channel Selectivity	ETSI: 60dB@12.5kHz / 70dB@20/25kHz
Intermodulation	ETSI: 65dB@12.5/20/25kHz
Spurious Response Rejection	ETSI: 70dB@12.5/20/25kHz
Blocking	ETSI: 84dB
Hum&Noise	40dB@12.5kHz; 43dB@20kHz; 45dB@25kHz
Rated Audio Power Output	0.5W
Rated Audio Distortion	≤5%
Audio Response	+1 to -3dB
Conducted Spurious Emission	<-57dBm

Transmitter	
Power Output	1W/2W/3W (low/medium/high)
FM Modulation	11K0F3E@12.5kHz 14K0F3E@20kHz 16K0F3E@25kHz
4FSK Digital Modulation	12.5kHz (only data): 7K60FXD 12.5kHz (V+D): 7K60FX
Conducted/Radiated Emission	-36dBm<1GHz; -30dBm>1GHz
Modulation Limiting	±2.5kHz@12.5kHz; ±4.0kHz@20kHz; ±5.0kHz@25kHz
FM Hum&Noise	40dB@12.5kHz; 43dB@20kHz; 45dB@25kHz
Adjacent Channel Power	60dB@12.5kHz; 70dB@20/25kHz
Audio Response	+1 to -3dB
Audio Distortion	≤3%

 $[\]ensuremath{^{*}}$ Data comes from Hytera labs. Actual battery life will vary.

-10°C~ +55°C
-30°C ~ +70°C
±4kV (Contact) ±8kV (Air)

Accessories

• Standard • Optional







Belt clip





Antenna (9cm, 400-470 MHz)



Multi-unit charger









USB Type-C cable



