



HyTalk PMR Gateway

Bridge networks. Bring connectivity.

- Enhanced collaboration
- Ease of use
- Extended reach
- Low latency







Overview

As broadband services increasingly flourish, some industries tend to buy broadband radios as a new communications way. However, these radios cannot be connected to the legacy narrowband radios. Replace all your legacy? It will be a large investment. Thus, we innovate HyTalk PMR Gateway to solve this problem for business, public safety, transportation, utilities, and more.

HyTalk PMR Gateway is a cost-effective narrowband-broadband interconnection solution, including BN100 voice gateway box, MNC360 PoC mobile radio, and HM78X or HM65X digital mobile radio. It has the capability to seamlessly connect the narrowband radios and broadband radios. Moreover, interworking with public network, it allows narrowband radios to communicate with each other anywhere.

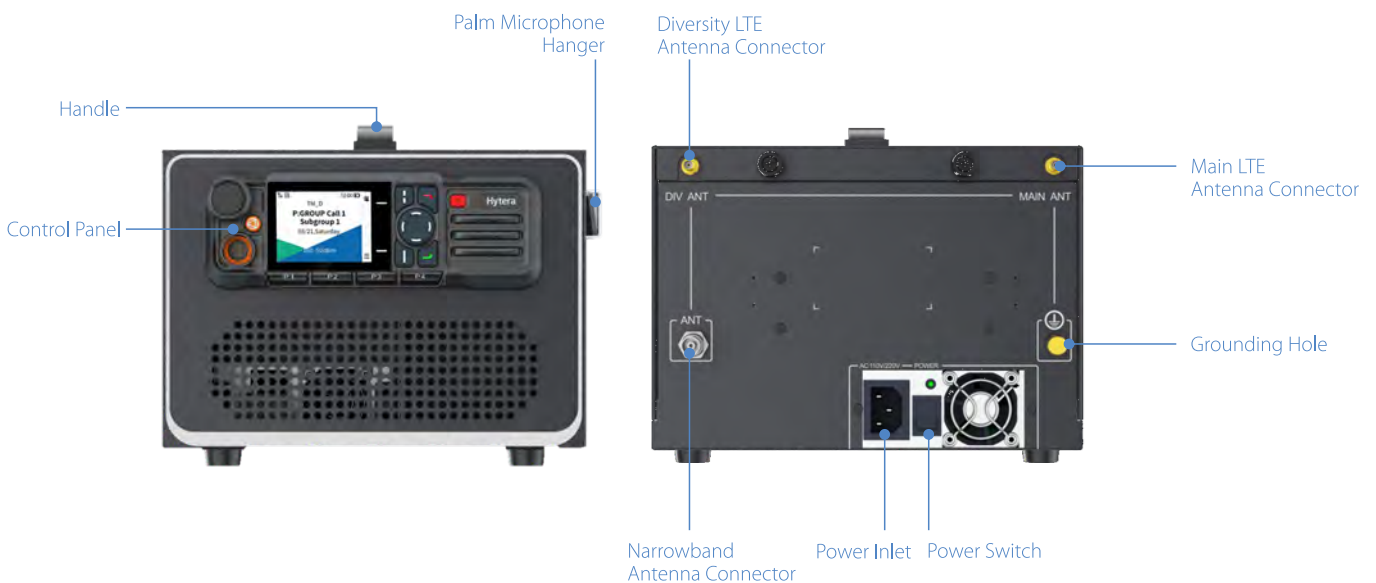


Key Benefits

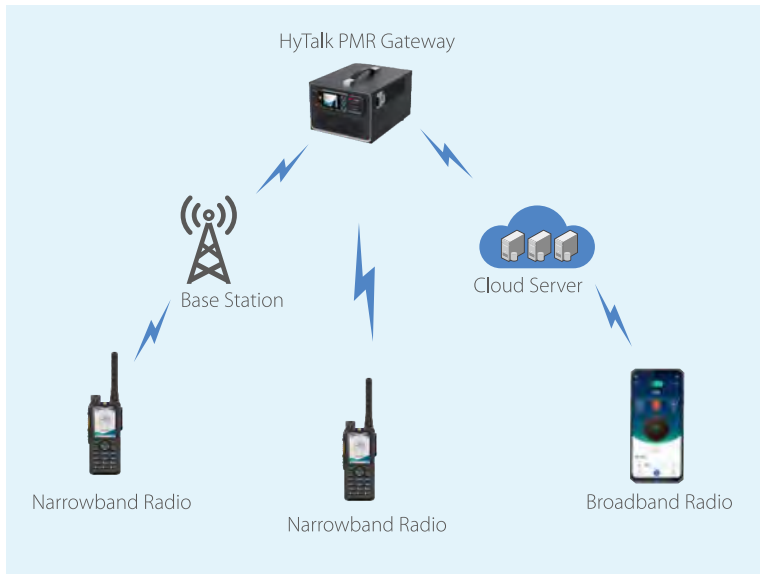

Enhanced collaboration

This solution unleashes the collaborative potential of radios in the field, no matter whether they are narrowband or broadband. This enables different user groups to seamlessly communicate with each other in a unified way for increased work efficiency.

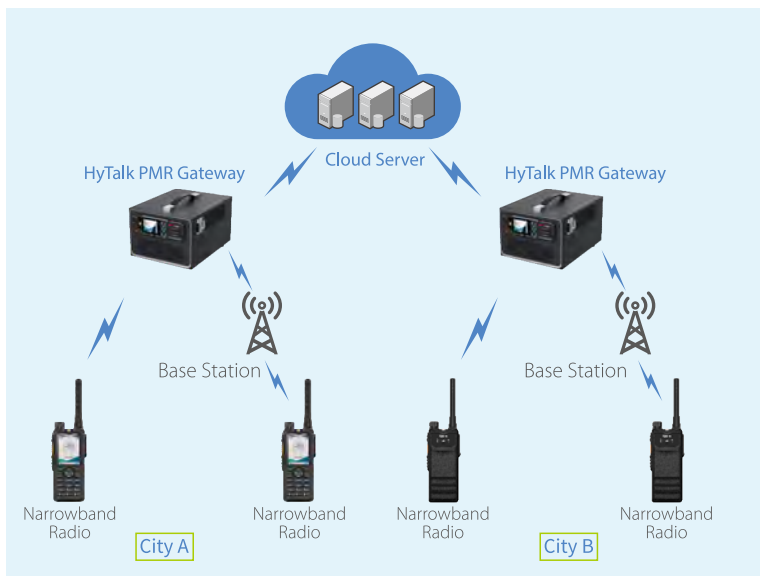

Extended reach

Leveraging the public network, this solution cost-effectively interconnects PMR networks in different regions, without building extra expensive ground infrastructure. So legacy narrowband radios can be reused for voice communication without boundaries, protecting the existing investments in narrowband.

Ease of use

Simple but intuitive, this solution is easy to deploy and use. The voice gateway box containing two mobile radios is compact and weighs less than 8 kg, which is designed for easy transport. A handle on the top of this box ensures a comfortable grip and fast carrying.

Low latency

This solution supports back-to-back connection between one PMR mobile radio and one PoC mobile radio. This greatly accelerates transmission rate and reduces audio latency. Thus, narrowband and broadband radio users can stay connected quickly.

Application Scenarios



Specifications

General	
Dimensions (L x W x H)	288 x 244 x 158 mm
Weight	No mobile radio: 2.8 kg With two mobile radios: 7.2 kg
Connector and Switch	
Narrowband Antenna Connector	1
LTE Antenna Connector	2
Power Inlet	1
Power Switch	1
Palm Microphone Connector	1
Input Voltage	100 - 240 V AC
Environmental	
Operating Temperature	-20°C to 60°C
Storage Temperature	-40°C to 85°C